

JOB NAME


ITEM NO.

SUBMITTED AS SHOWN

SUBMITTED AS NOTED

SEE ATTACHED FOR
SUBMITTED MODIFICATION

NOTE: IT IS RECOMMENDED THAT THIS VALVE BE INSTALLED
WITH ACCESSIBLE STOPS WHICH SHALL BE SUPPLIED BY OTHERS
(IN THE EVENT SERVICE SHOULD BE REQUIRED).

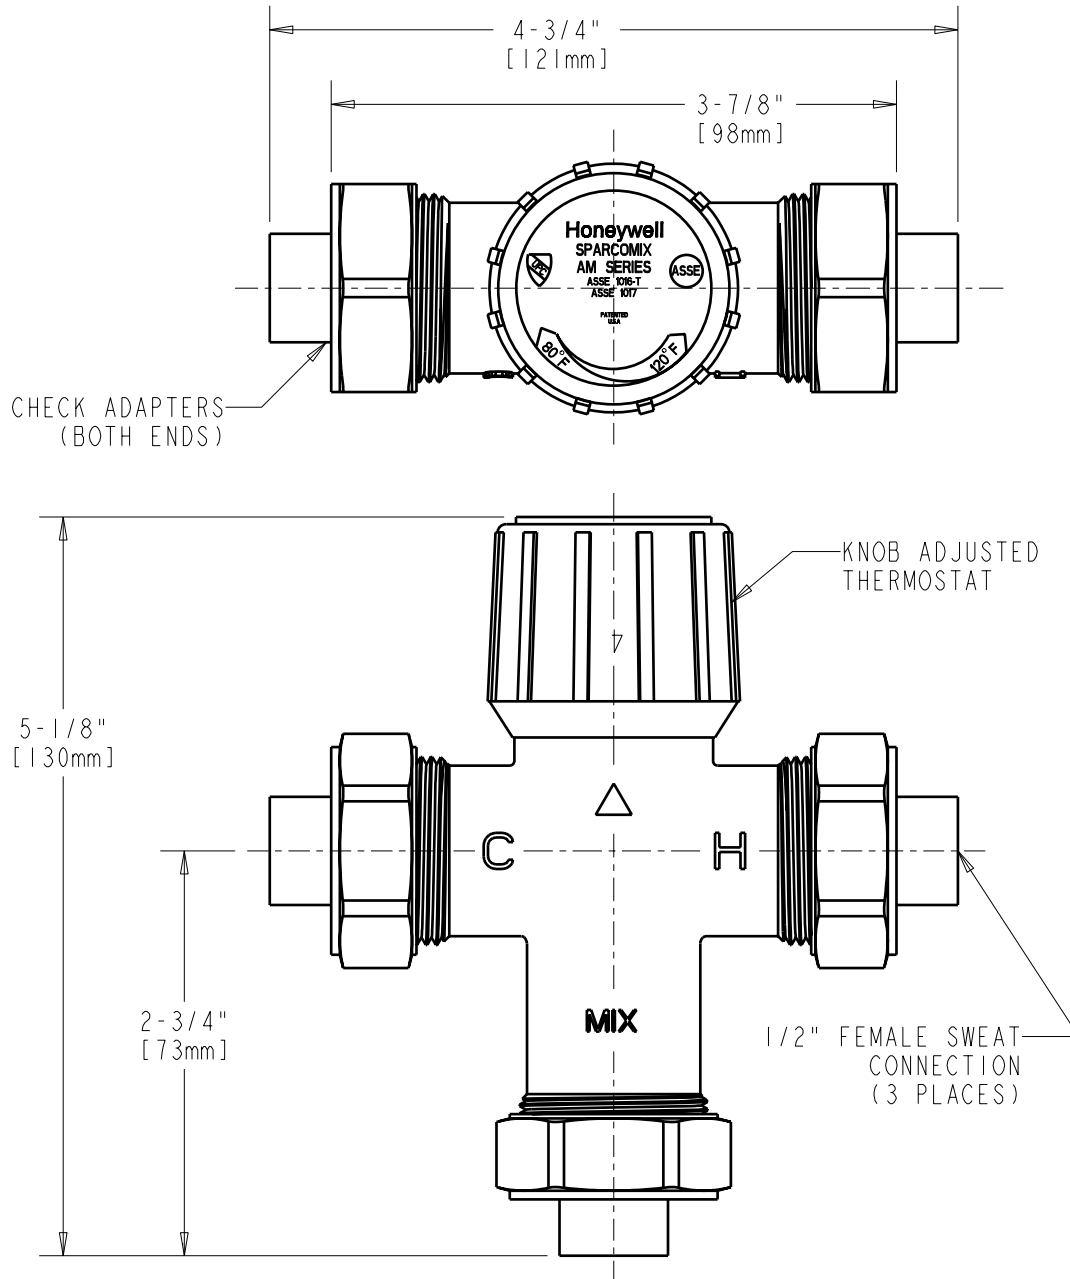

TECHNICAL DATA

- THERMOSTATIC MIXING VALVE FOR 1 TO 6 FITTINGS
- 80°-120° RANGE FOR MIXED WATER TEMPERATURE
- IN-LINE CHECK VALVES ON HOT AND COLD WATER INLETS

FLOW PERFORMANCE:
- 50 PSID @ 12.5 GPM
- 40 PSID @ 11.0 GPM
- 30 PSID @ 9.5 GPM

DATE: 7-18-02

BY: JAR

CHK'D:

APP'D:

REV: B