



AquaFlow

Wall Mounted Drinking Fountain

SUGGESTED SPECIFICATIONS

Model A461400P is a wall mounted, vandal resistant drinking fountain made from 18 gage, 304 stainless steel with a brushed finish. Unit shall have a push button polished chrome plated brass bubbler with a non-squirt feature and operate on water pressure range of 20-105 psig. Unit shall have a wall bracket. Unit shall adhere to ANSI/NSF 61, Section 9.

Stainless Steel Model:
A461400P



STANDARD FEATURES

- 18 gage, 304 stainless steel
- Polished chrome plated brass, anti-rotation non-squirt push button bubbler
- Vandal resistant screws
- Wall bracket



Member of
U.S. Green
Building
Council



Recyclable
Product



Water
Conserving
Product

OPTIONAL ACCESSORIES (additional costs)

- PT1 P-trap, 1-1/4" O.D.

Acorn Aqua™ assumes no responsibility for use of void or suspended data. © Copyright 2009 Acorn Aqua™, City of Industry, CA, A Division of Acorn Engineering Company. Please visit www.acornaqua.com for most current specifications.

Submittal # **A461400P**
[Sec. D] Rev. D 8/1/09

COMPLIES WITH
STANDARDS



ANSI / NSF 61.9



C



Member of Acorn
Family of Companies


ACORN AQUA
15125 Proctor Avenue
City of Industry, CA
91746 U.S.A.
Phone 800-591-9360
626-336-4561
Fax 626-855-4894
www.acornaqua.com



TECHNICAL
DIMENSIONS

All dimensions are nominal and subject to manufacturer's change without notice. Acorn Aqua™ assumes no responsibility for use of void or suspended data. © 2009 Acorn Aqua™, a Division of Acorn Engineering Company. Please visit www.acornaqua.com for most current specifications.

☐ **Stainless Steel Model:**
A461400P

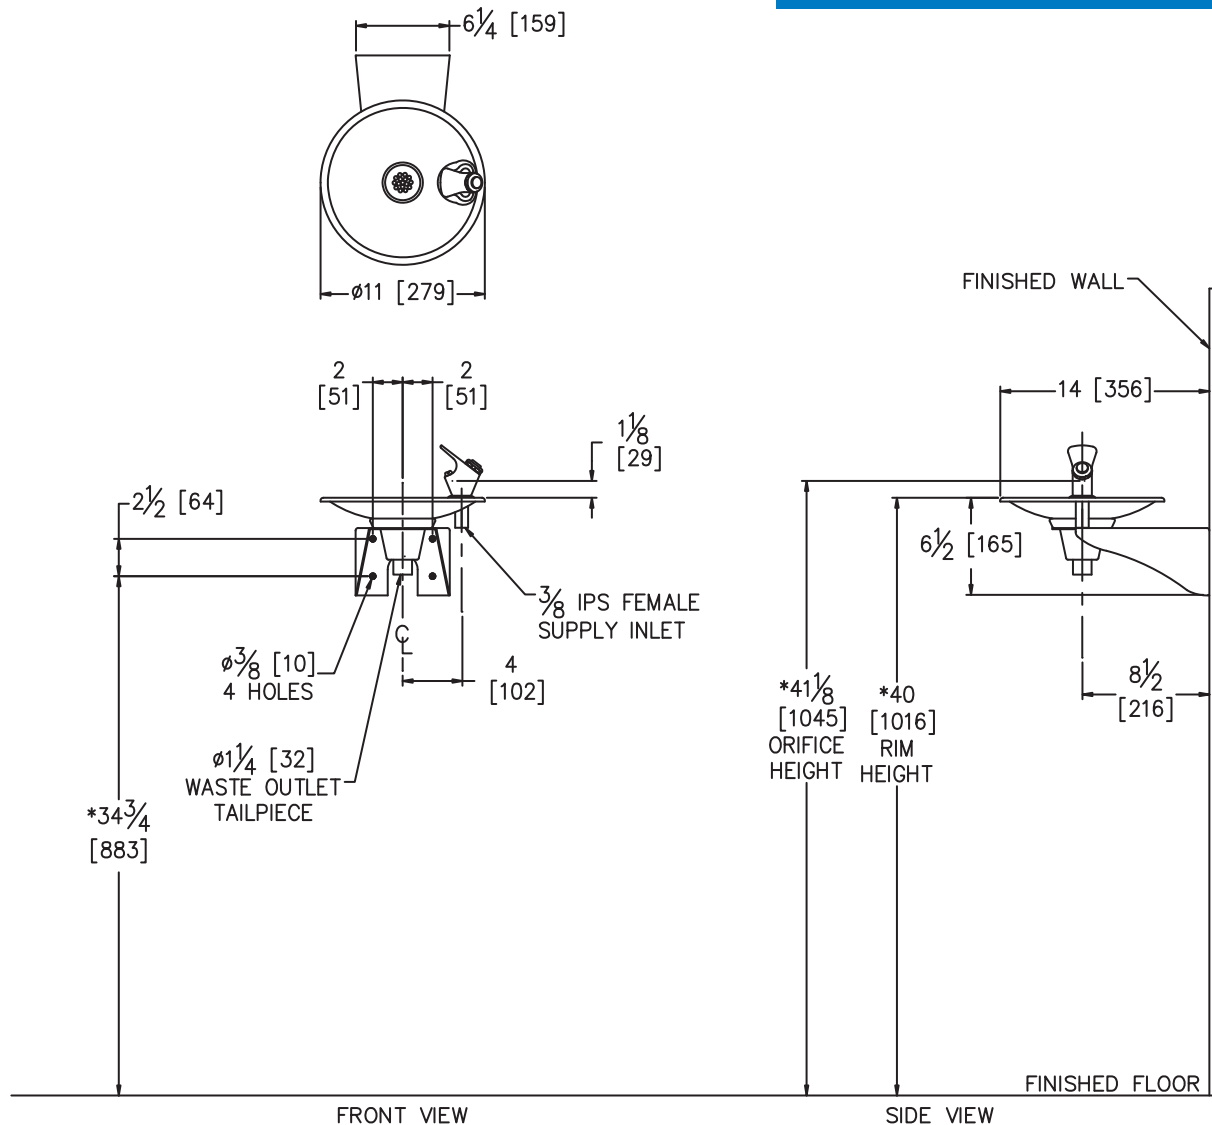

GENERAL NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MM].
- *2. DIMENSIONS SHOWN ARE FOR RECOMMENDED ADULT HEIGHT. ADJUST VERTICAL DIMENSIONS AS NECESSARY TO COMPLY WITH FEDERAL, STATE, & LOCAL CODES.
3. STOP VALVE AND UNION NOT PROVIDED.

AquaFlow Wall Mounted Drinking Fountain

Rough-in # **A461400P** Rev. B 8/1/09

Five Year Limited Warranty- (Continental United States and Canada Only) The following components are warranted for five years: Compressor, Condenser Coil and Refrigeration Coil. The following components shall only be warranted for a period of one year: Evaporator Can Assembly, Thermostat, Fan Motor, Cartridge, Push Buttons, Compressor Starting Relay/Overload/Capacitor and Activation Linkage. Other parts are warranted for one (1) year from date of installation.

Limited Export Warranty- One (1) year on parts only.

SELECTION SUMMARY
& APPROVAL FOR
MANUFACTURING

Company _____

Model Number & Options _____ Quantity _____

Contact _____ Title _____

Signature _____
(Approval for Manufacturing)

Date _____



800-591-9360
626-336-4561
www.acornaqua.com