

SC-5741



SC-5742



Thru/Back Sink Fitting

GENERAL SPECIFICATION

Chrome plated cast brass thru/back sink fitting. 5 1/4" deep spread gooseneck spout, rigid or swivel. 8" centers with eccentric inlets. Adjustable threaded brass wall flanges. 1/2" NPTF inlets. Vandal-resistant flow control reduces flow to 2.2 gpm/8.4 lpm maximum. Meets ASME A112.18.1/CSA B125.1 and NSF61.

☐ **SC-5741**

Vandal-resistant four-arm handles with color-coded indexes.

☐ **SC-5742**

Vandal-resistant lever handles with color-coded indexes.

OPTIONS

SUFFIX	DESCRIPTION
☐ BO	0.5 gpm flow control, vandal-resistant
☐ CA**	No lead for CA AB1953 compliance
☐ FC*	2.0 gpm laminar flow control, plain end spout
☐ GB	1.5 gpm flow control, vandal-resistant
☐ LF	2.2 gpm laminar flow control outlet
☐ MI	Metal index for handles
☐ SO	Rose spray outlet
☐ 4*	3-3/4" deep spread gooseneck spout, rigid or swivel
☐ 8*	8" deep spread gooseneck spout, rigid or swivel
☐ 9*	9" deep tubular swing spout, rigid or swivel
☐ 12*	12" deep tubular swing spout, rigid or swivel
☐ EC	RCP eccentric couplings adjust for installations with 4" to 12" centers
☐ VB6*	6" deep spread rigid vacuum breaker spout
☐ VB8*	8" deep spread rigid vacuum breaker spout

VACUUM BREAKER OPTIONS

SUFFIX	DESCRIPTION
☐ ST	Serrated tip
☐ SW	Swivel spout

* See page 137 for optional spout specifications


** The following options are not available with the "CA" option:
HS (Hose & Spray), EC, SO, TWI, VB6, VB8, ST, SW, & TMV.

This space for Architect/Engineer approval.




Rough-Ins

SC-5741

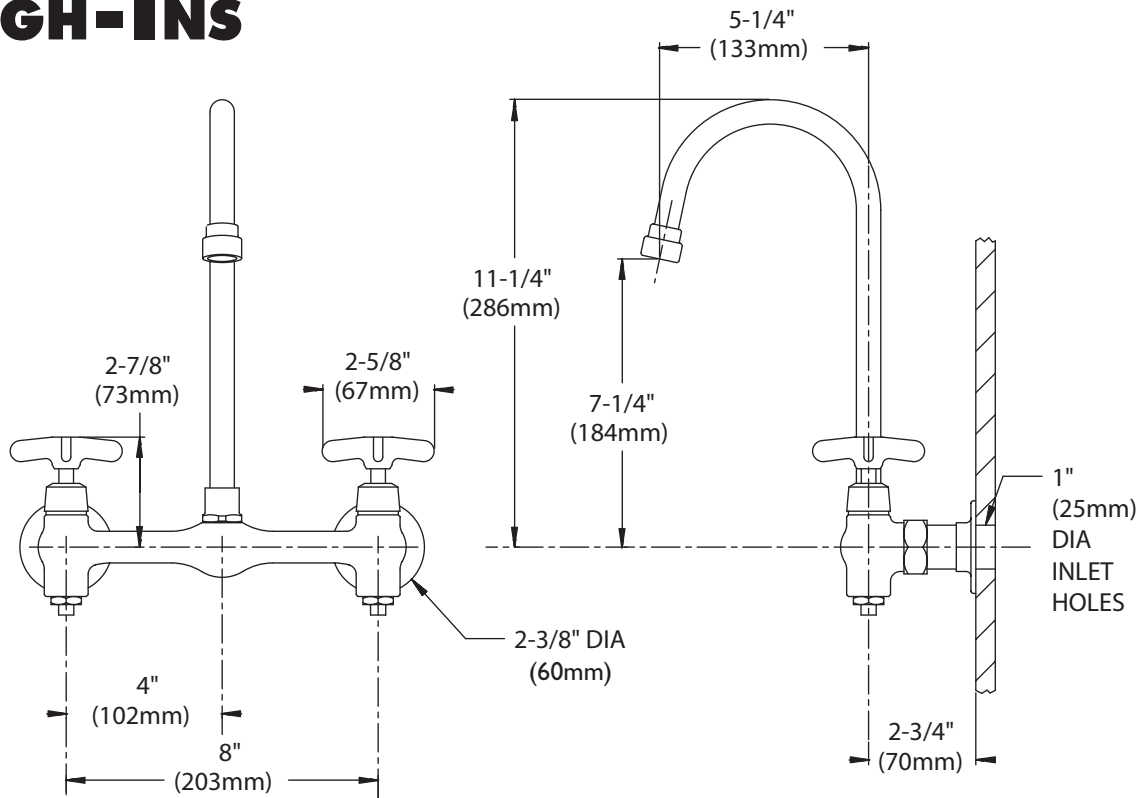

SC-5742

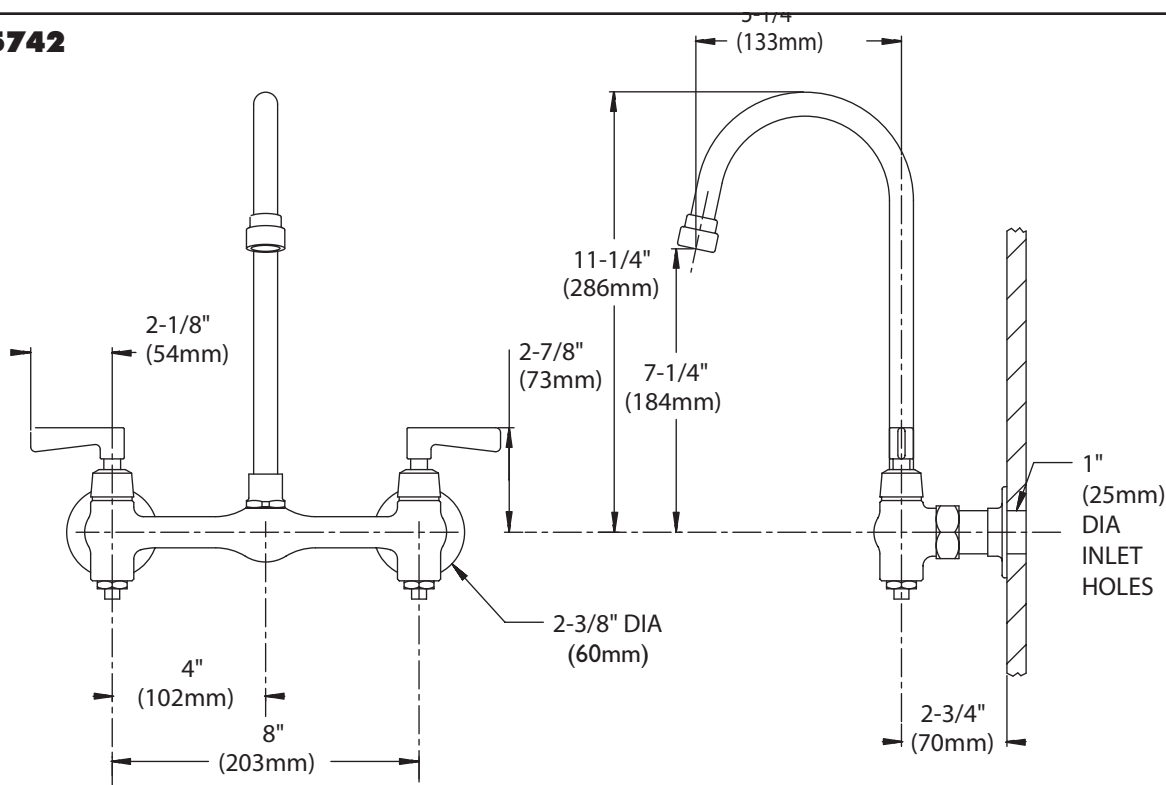

NOTE: All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. Unless otherwise specified, all inlets are 1/2" NPTF.




Spout -4, rigid or swivel
3-3/4" deep gooseneck



Spout -4FC, rigid or swivel
3-3/4" deep plain end gooseneck;
laminar flow in base of spout



Spout -5, rigid or swivel
5-1/4" deep gooseneck

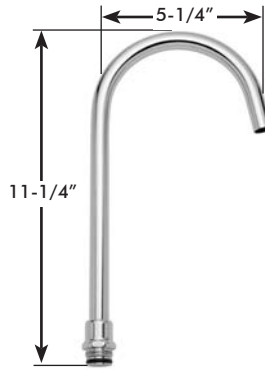

Spout -5FC, rigid or swivel
5-1/4" deep plain end gooseneck;
laminar flow in base of spout



STANDARD SPOUT FOR
DECK MOUNTED
KITCHEN SINK FITTINGS


Spout -8, rigid or swivel
8" deep gooseneck




Spout -8FC, rigid or swivel
8" deep plain end gooseneck;
laminar flow in base of spout




Spout -9, rigid or swivel
9" deep tubular swing spout

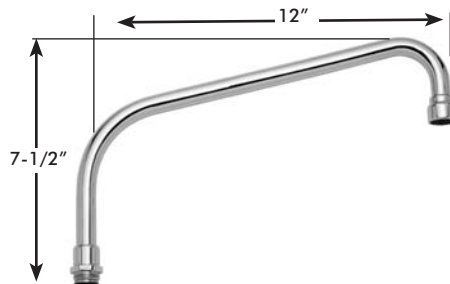


Spout -12, rigid or swivel
12" deep tubular swing spout




Spout -VB6, rigid
6" deep rigid vacuum breaker spout

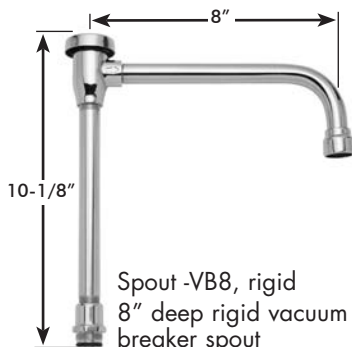

Spout -VB8, rigid
8" deep rigid vacuum
breaker spout

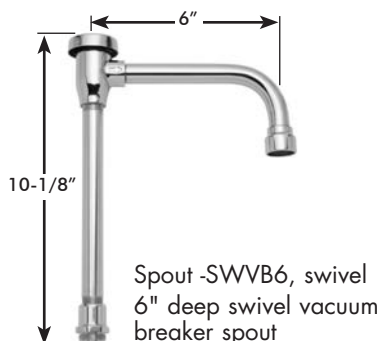

Spout -SWVB6, swivel
6" deep swivel vacuum
breaker spout

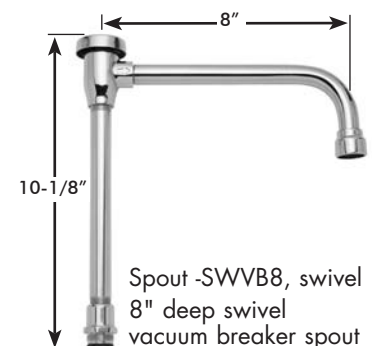

Spout -SWVB8, swivel
8" deep swivel
vacuum breaker spout